


D-SUB. HIGH DENSITY CONNECTOR SOLDER TYPE

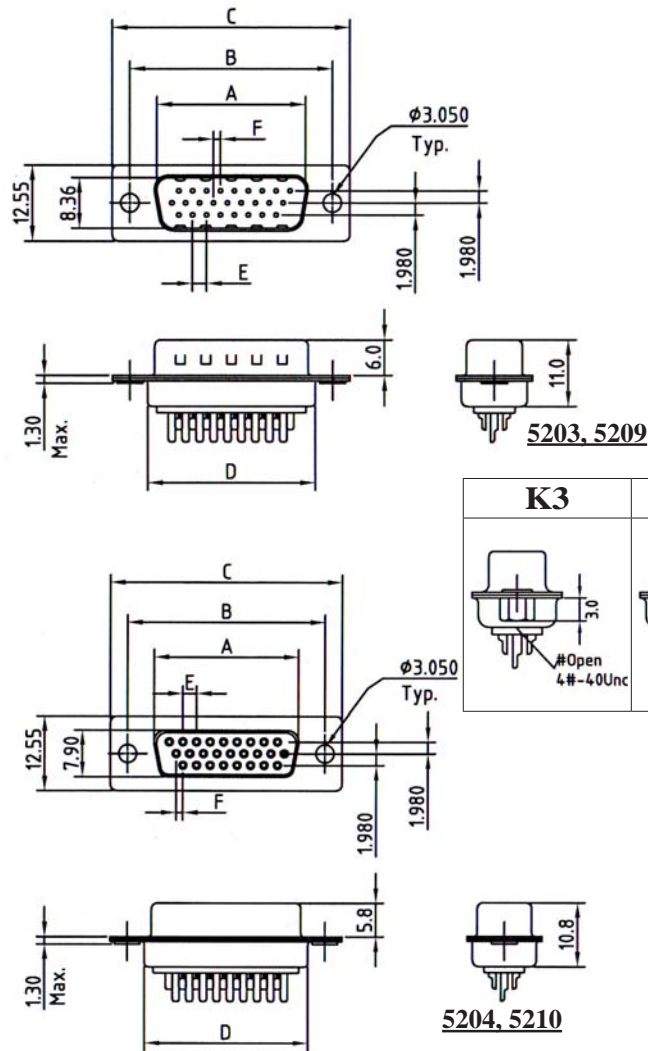


SPECIFICATIONS

Current Rating: 3A or 5A
Contact Resistance: 25mΩ Max.
Insulation Resistance: 1000MΩ Min. at 500V
Dielectric Voltage: 1000V at 1 Minute
Operating Temperature: -55°C to +105°C

MATERIALS

Insulator: PBT, UL94V-0 Rated
Contact: Brass
Shell: Brass, Steel
Contact Plating: Gold Over Nickel Plated
Shell Plating: Tin Over Copper Plated
 *RoHS & REACH compliant.

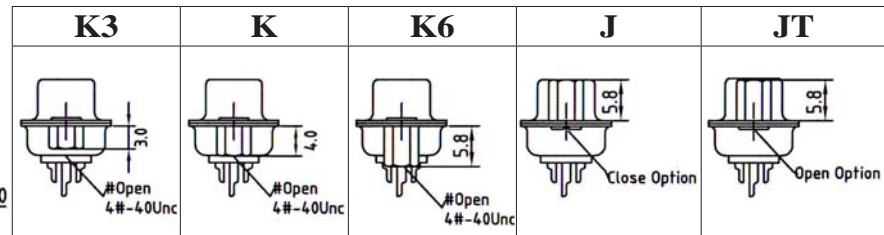

5203, 5209

No. of Contacts	Dimensions(mm)					
	A	B	C	D	E	F
15	16.92	24.99	30.81	19.23	2.29	1.145
26	25.25	33.32	39.14	27.56	2.29	1.145
44	38.96	47.04	53.04	41.28	2.29	1.145
62	55.42	63.50	69.32	57.33	2.41	1.205

5204, 5210

No. of Contacts	Dimensions(mm)					
	A	B	C	D	E	F
15	16.33	24.99	30.81	19.23	2.29	1.145
26	24.66	33.32	39.14	27.56	2.29	1.145
44	38.38	47.04	53.04	41.28	2.29	1.145
62	54.84	63.50	69.32	57.33	2.41	1.205

ORDERING INFORMATION:

P/N 5 2 $\frac{xx}{1}$ - $\frac{xx}{2}$ $\frac{T}{3}$ $\frac{W}{4}$ / $\frac{xx}{5}$

1. CONNECTOR TYPE:

- "03" MALE WITH FULL GOLD PLATED STAMPED CONTACTS (3A)
- "04" FEMALE WITH FULL GOLD PLATED STAMPED CONTACTS (3A)
- "09" MALE WITH SELECTIVE GOLD PLATED STAMPED CONTACTS (3A)
- "10" FEMALE WITH SELECTIVE GOLD PLATED STAMPED CONTACTS (3A)
- "87" MALE WITH FULL GOLD PLATED MACHINED CONTACTS (5A)
- "88" FEMALE WITH FULL GOLD PLATED MACHINED CONTACTS (5A)

2. NO. OF CONTACTS:

15, 26, 44, 62, 78

3. SHELL FINISH:

"T" TIN PLATED

4. INSULATOR COLOR:

"W" WHITE (STANDARD)

"B" BLACK

"U" BLUE

5. MOUNTING OPTION:

" " Ø3.05MM THROUGH HOLES

OTHERS: K, K3, K6, J, JT, J4