



## DUAL PORT DB9/DB15 CONNECTOR RIGHT ANGLE TYPE (FOOTPRINT= 8.08MM)

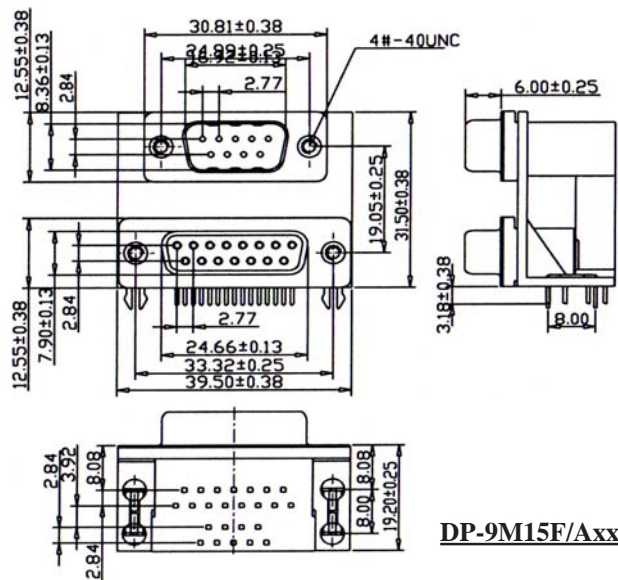

DP-9M15F/Axx

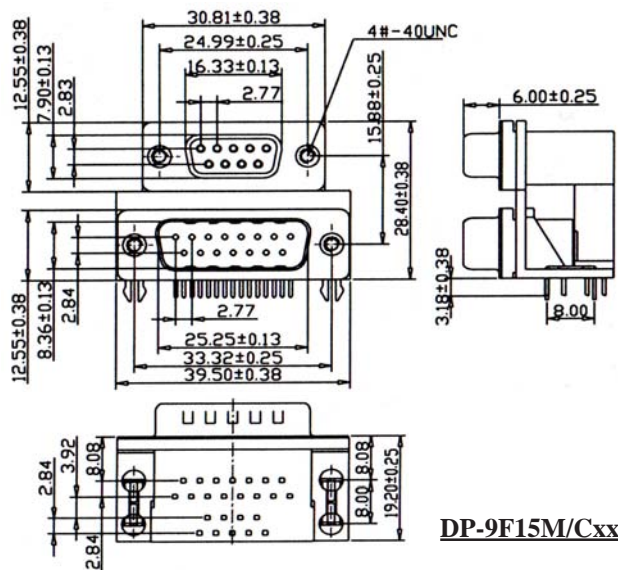

DP-9F15M/Cxx

### SPECIFICATIONS

Current Rating: 3.0 Amperes

Contact Resistance: 25mΩ Max.

Insulation Resistance: 1000MΩ Min. at 500V

Dielectric Voltage: 1000V at 1 Minute

Operating Temperature: -55°C to +105°C

### MATERIALS

Insulator: PBT, UL94V-0 Rated


Contact: Brass

Shell: Brass, Steel

Contact Plating: Gold Over Nickel Plated

Shell Plating: Tin Over Copper Plated

\*RoHS & REACH compliant.

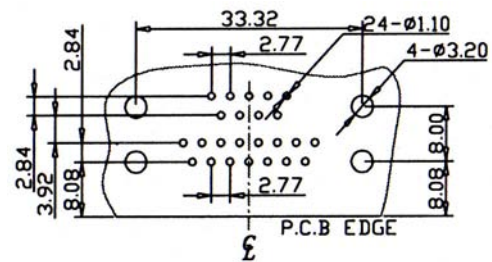

Recommended P.C.Board Layout

### ORDERING INFORMATION:

P/N DP-9  $\frac{x}{1}$  15  $\frac{x}{2}$  /  $\frac{x}{3}$   $\frac{x}{4}$

#### 1. TOP CONNECTOR TYPE:

"F" FEMALE

"M" MALE

#### 2. BOTTOM CONNECTOR TYPE:

"F" FEMALE

"M" MALE

#### 3. SPACING BETWEEN PORTS:

"A" 19.05MM(0.750")

"C" 15.88MM(0.625")


#### 4. FLANGE MOUNTING OPTION:

"N" #4-40UNC THREADED HOLES WITHOUT HEX SCREW BOLTS


"NH" #4-40UNC THREADED HOLES WITH BULK-PACKED (LOOSE) #4-40UNC HEX SCREW BOLTS

"NJ" #4-40UNC THREADED HOLES WITH INSTALLED (ASSEMBLED) #4-40UNC HEX SCREW BOLTS

## DUAL PORT DB9/DB25 CONNECTOR RIGHT ANGLE TYPE (FOOTPRINT= 8.08MM)

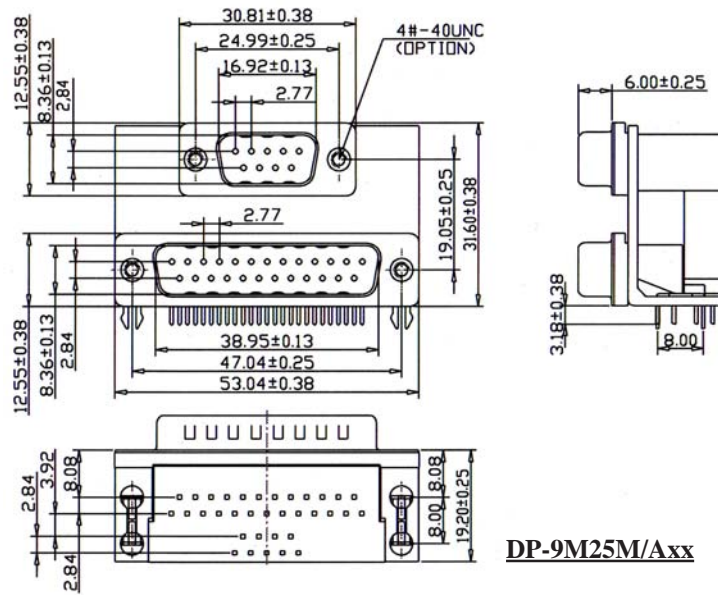

DP-9M25M/Axx

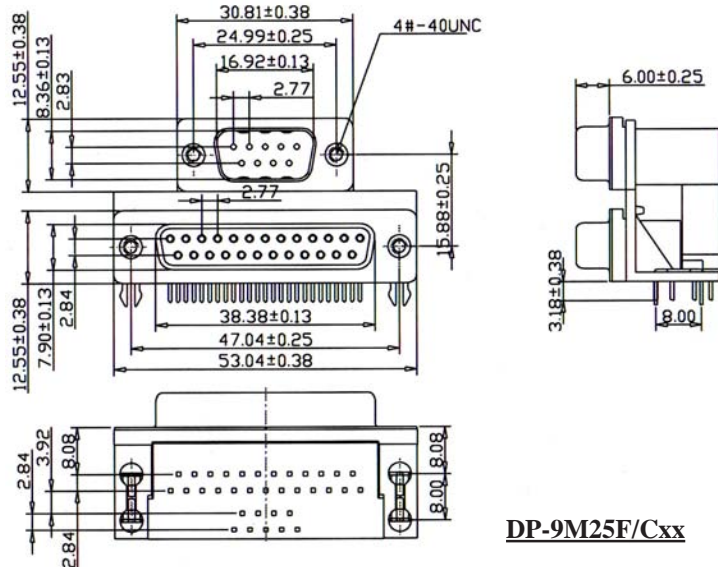


DP-9M25F/Cxx

### SPECIFICATIONS

**Current Rating:** 3.0 Amperes  
**Contact Resistance:** 25mΩ Max.  
**Insulation Resistance:** 1000MΩ Min. at 500V  
**Dielectric Voltage:** 1000V at 1 Minute  
**Operating Temperature:** -55°C to +105°C

### MATERIALS

**Insulator:** PBT, UL94V-0 Rated  
**Contact:** Brass  
**Shell:** Brass, Steel  
**Contact Plating:** Gold Over Nickel Plated  
**Shell Plating:** Tin Over Copper Plated  
**\*RoHS & REACH compliant.**

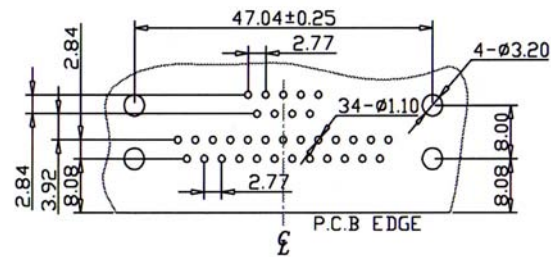

Recommended P.C. Board Layout

### ORDERING INFORMATION:

P/N DP-9  $\frac{x}{1}$  25  $\frac{x}{2}$  /  $\frac{x}{3}$   $\frac{xx}{4}$

#### 1. TOP CONNECTOR TYPE:

"F" FEMALE  
 "M" MALE

#### 2. BOTTOM CONNECTOR TYPE:

"F" FEMALE  
 "M" MALE

#### 3. SPACING BETWEEN PORTS:

"A" 19.05MM(0.750")  
 "C" 15.88MM(0.625")

#### 4. FLANGE MOUNTING OPTION:

"N" #4-40UNC THREADED HOLES  
 WITHOUT HEX SCREW BOLTS

"NH" #4-40UNC THREADED HOLES  
 WITH BULK-PACKED (LOOSE)  
 #4-40UNC HEX SCREW BOLTS

"NJ" #4-40UNC THREADED HOLES  
 WITH INSTALLED (ASSEMBLED)  
 #4-40UNC HEX SCREW BOLTS