



DUAL PORT DB9/HD15 CONNECTOR RIGHT ANGLE TYPE (FOOTPRINT= 5.08MM)

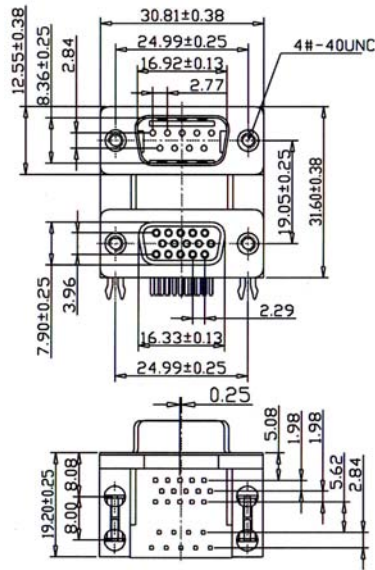

DPD-9MHD15F/Axx

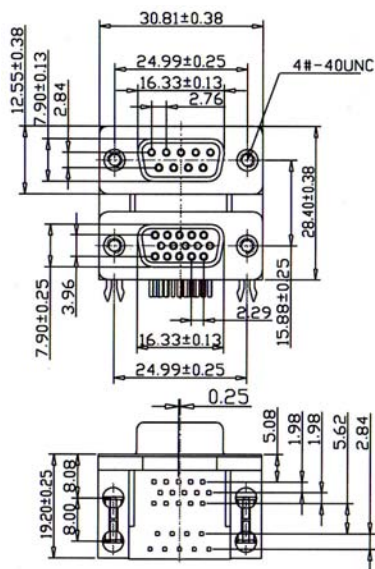


DPD-9FHD15F/Cxx

SPECIFICATIONS

Current Rating: 3.0 Amperes
Contact Resistance: 25mΩ Max.
Insulation Resistance: 1000MΩ Min. at 500V
Dielectric Voltage: 1000V at 1 Minute
Operating Temperature: -55°C to +105°C

MATERIALS

Insulator: PBT, UL94V-0 Rated
Contact: Brass
Shell: Brass, Steel
Contact Plating: Gold Over Nickel Plated
Shell Plating: Tin Over Copper Plated
 *RoHS & REACH compliant.

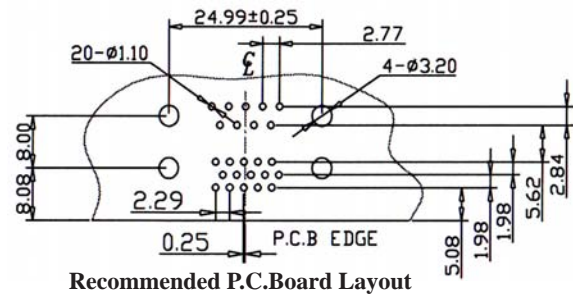

ORDERING INFORMATION:

P/N DPD - 9 $\frac{x}{1}$ HD 15 $\frac{x}{2}$ / $\frac{x}{3}$ $\frac{x}{4}$

1. TOP CONNECTOR TYPE:

"F" FEMALE
 "M" MALE

2. BOTTOM CONNECTOR TYPE:

"F" FEMALE
 "M" MALE

3. SPACING BETWEEN PORTS:

"A" 19.05MM(0.750")
 "C" 15.88MM(0.625")

4. FLANGE MOUNTING OPTION:

"N" #4-40UNC THREADED HOLES WITHOUT HEX SCREW BOLTS
 "NH" #4-40UNC THREADED HOLES WITH BULK-PACKED (LOOSE) #4-40UNC HEX SCREW BOLTS
 "NJ" #4-40UNC THREADED HOLES WITH INSTALLED (ASSEMBLED) #4-40UNC HEX SCREW BOLTS