

Current Rating: 3.0 Amperes
Contact Resistance: 25mΩ Max.
Insulation Resistance: 1000MΩ Min. at 500V
Dielectric Voltage: 1000V at 1 Minute
Operating Temperature: -55°C to +105°C

Insulator: PBT, UL94V-0 Rated
Contact: Brass
Shell: Brass, Steel
Contact Plating: Gold Over Nickel Plated
Shell Plating: Tin Over Copper Plated
***RoHS & REACH compliant.**

Technical drawing of a 4#-40UNC component, showing three views: Top View, Front View, and Side View. Dimensions are provided in inches with tolerances.

Top View Dimensions:



- Overall Width: 30.81 ± 0.38
- Overall Height: 24.99 ± 0.25
- Inner Width: 16.33 ± 0.13
- Inner Height: 15.88 ± 0.25
- Distance from top edge to inner feature: 12.55 ± 0.38
- Distance from bottom edge to inner feature: 7.90 ± 0.13
- Distance from left edge to inner feature: 2.84
- Distance from right edge to inner feature: 2.77
- Thread specification: 4#-40UNC

Front View Dimensions:

- Overall Width: 30.81 ± 0.38
- Overall Height: 24.99 ± 0.25
- Inner Width: 16.33 ± 0.13
- Inner Height: 15.88 ± 0.25
- Distance from top edge to inner feature: 12.55 ± 0.38
- Distance from bottom edge to inner feature: 7.90 ± 0.13
- Distance from left edge to inner feature: 2.84
- Distance from right edge to inner feature: 2.77
- Thread specification: 4#-40UNC

Side View Dimensions:

- Overall Width: 30.81 ± 0.38
- Overall Height: 24.99 ± 0.25
- Inner Width: 16.33 ± 0.13
- Inner Height: 15.88 ± 0.25
- Distance from top edge to inner feature: 12.55 ± 0.38
- Distance from bottom edge to inner feature: 7.90 ± 0.13
- Distance from left edge to inner feature: 2.84
- Distance from right edge to inner feature: 2.77
- Thread specification: 4#-40UNC

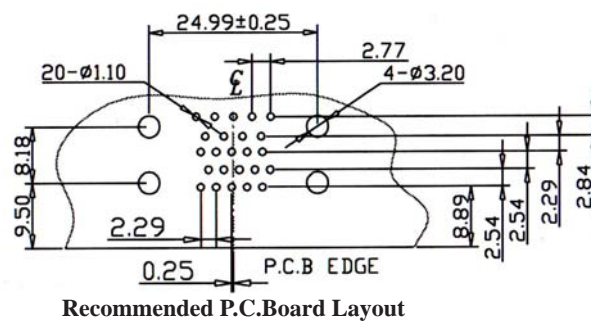

P/N DPH - 9 1 HD 15 2 / 3 4

- C0123