
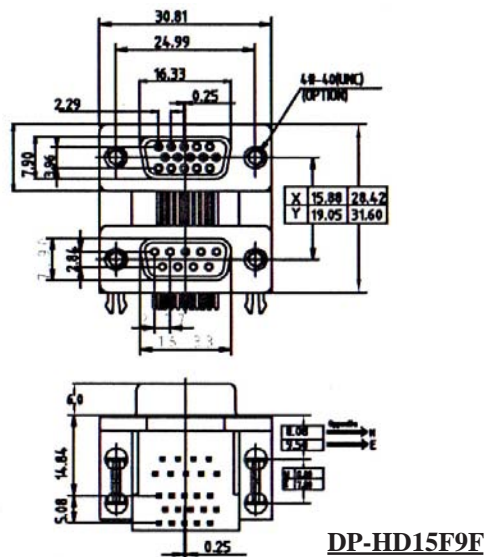


## DUAL PORT HD15/DB09 CONNECTOR RIGHT ANGLE TYPE (FOOTPRINT= 8.08MM)

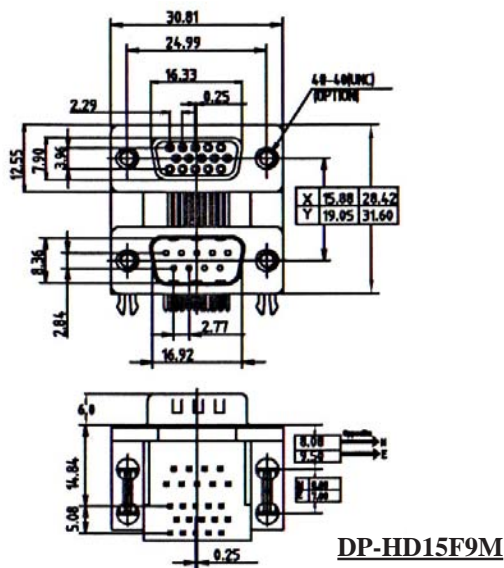


### SPECIFICATIONS

Current Rating: 3.0 Amperes  
 Contact Resistance: 25mΩ Max.  
 Insulation Resistance: 1000MΩ Min. at 500V  
 Dielectric Voltage: 1000V at 1 Minute  
 Operating Temperature: -55°C to +105°C

### MATERIALS

Insulator: PBT, UL94V-0 Rated  
 Contact: Brass  
 Shell: Brass, Steel  
 Contact Plating: Gold Over Nickel Plated  
 Shell Plating: Tin Over Copper Plated  
 \*RoHS & REACH compliant.


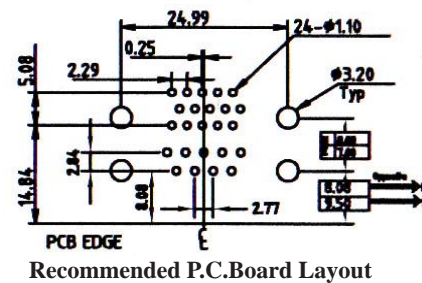


### ORDERING INFORMATION:

P/N DP-HD15  $\frac{X}{1}$   $\frac{9}{2}$  /  $\frac{X}{3}$   $\frac{X}{4}$

- TOP CONNECTOR TYPE:  
 "F" FEMALE  
 "M" MALE
- BOTTOM CONNECTOR TYPE:  
 "F" FEMALE  
 "M" MALE
- SPACING BETWEEN PORTS:  
 "A" 19.05MM(0.750")  
 "C" 15.88MM(0.625")
- FLANGE MOUNTING OPTION:  
 "N" #4-40UNC THREADED HOLES WITHOUT HEX SCREW BOLTS  
 "NH" #4-40UNC THREADED HOLES WITH BULK-PACKED (LOOSE) #4-40UNC HEX SCREW BOLTS  
 "NJ" #4-40UNC THREADED HOLES WITH INSTALLED (ASSEMBLED) #4-40UNC HEX SCREW BOLTS

## DUAL PORT HD26/DB15 CONNECTOR RIGHT ANGLE TYPE (FOOTPRINT= 8.08MM)

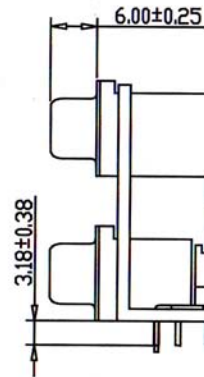
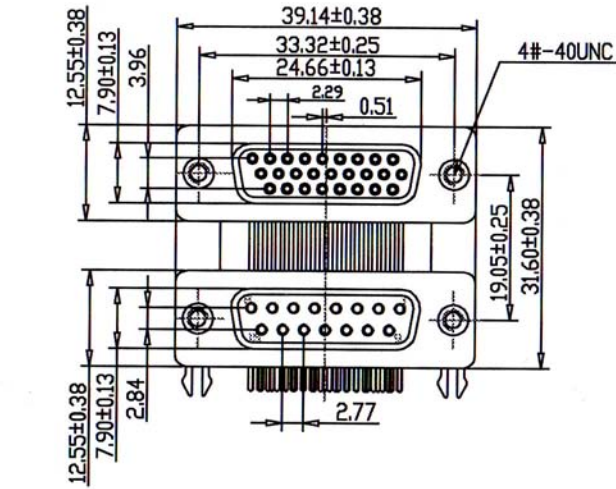


### SPECIFICATIONS

Current Rating: 3.0 Amperes  
 Contact Resistance: 25mΩ Max.  
 Insulation Resistance: 1000MΩ Min. at 500V  
 Dielectric Voltage: 1000V at 1 Minute  
 Operating Temperature: -55°C to +105°C

### MATERIALS

Insulator: PBT, UL94V-0 Rated  
 Contact: Brass  
 Shell: Brass, Steel  
 Contact Plating: Gold Over Nickel Plated  
 Shell Plating: Tin Over Copper Plated  
 \*RoHS & REACH compliant.

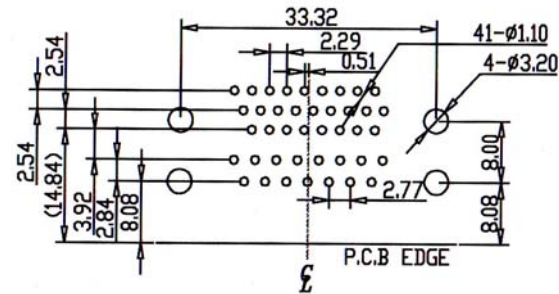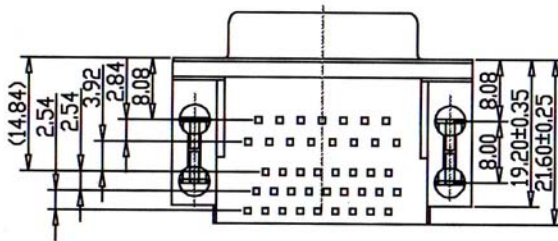

Recommended P.C.Board Layout

### ORDERING INFORMATION:

P/N DP-HD26<sub>1</sub>x15<sub>2</sub>x/3<sub>3</sub>x4<sub>4</sub>

#### 1. TOP CONNECTOR TYPE:

"F" FEMALE  
 "M" MALE

#### 2. BOTTOM CONNECTOR TYPE:

"F" FEMALE  
 "M" MALE

#### 3. SPACING BETWEEN PORTS:

"A" 19.05MM(0.750")  
 "C" 15.88MM(0.625")

#### 4. FLANGE MOUNTING OPTION:

"N" #4-40UNC THREADED HOLES  
 WITHOUT HEX SCREW BOLTS

"NH" #4-40UNC THREADED HOLES  
 WITH BULK-PACKED (LOOSE)  
 #4-40UNC HEX SCREW BOLTS

"NJ" #4-40UNC THREADED HOLES  
 WITH INSTALLED (ASSEMBLED)  
 #4-40UNC HEX SCREW BOLTS