
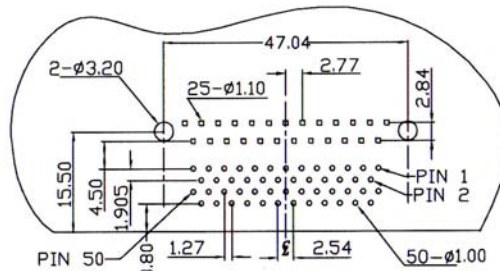



## DUAL PORT DB25 TO HPDB50 SCSI-II CONNECTOR RIGHT ANGLE TYPE

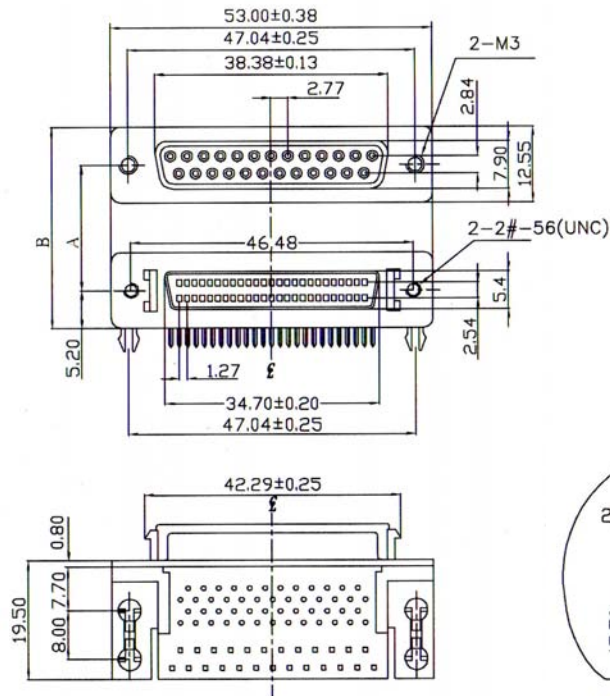

Recommended P.C. Board Layout

### SPECIFICATIONS

**Current Rating:** 3.0 Amperes  
**Contact Resistance:** 25mΩ Max.  
**Insulation Resistance:** 1000MΩ Min. at 500V  
**Dielectric Voltage:** 1000V at 1 Minute  
**Operating Temperature:** -55°C to +105°C

### MATERIALS

**Insulator:** PBT, UL94V-0 Rated  
**Contact:** Brass  
**Shell:** Brass, Steel  
**Contact Plating:** Gold Over Nickel Plated  
**Shell Plating:** Tin Over Copper Plated  
**\*RoHS & REACH compliant.**

### ORDERING INFORMATION:

P/N DP-25  $\frac{F}{1}$  HP50  $\frac{F}{2}$  /  $\frac{X}{3}$   $\frac{X}{4}$

#### 1. TOP CONNECTOR TYPE:

"F" FEMALE  
 "M" MALE

#### 2. BOTTOM CONNECTOR TYPE:

"F" FEMALE  
 "M" MALE

#### 3. SPACING BETWEEN PORTS:

"C" A= 15.88MM(0.625")  
 "F" A= 20.57MM(0.810")

#### 4. FLANGE MOUNTING OPTION:

"N" #4-40UNC THREADED HOLES  
 WITHOUT HEX SCREW BOLTS

"NH" #4-40UNC THREADED HOLES  
 WITH BULK-PACKED (LOOSE)  
 #4-40UNC HEX SCREW BOLTS

"NJ" #4-40UNC THREADED HOLES  
 WITH INSTALLED (ASSEMBLED)  
 #4-40UNC HEX SCREW BOLTS