



DUAL PORT DB25/HD15 CONNECTOR RIGHT ANGLE TYPE (FOOTPRINT= 5.08MM)

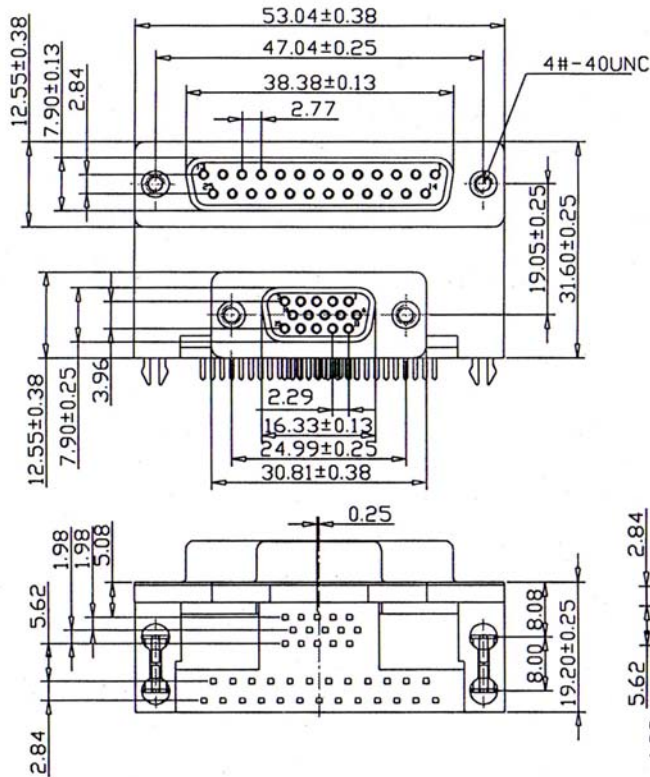


SPECIFICATIONS

Current Rating: 3.0 Amperes
Contact Resistance: 25mΩ Max.
Insulation Resistance: 1000MΩ Min. at 500V
Dielectric Voltage: 1000V at 1 Minute
Operating Temperature: -55°C to +105°C

MATERIALS

Insulator: PBT, UL94V-0 Rated
Contact: Brass
Shell: Brass, Steel
Contact Plating: Gold Over Nickel Plated
Shell Plating: Tin Over Copper Plated
 *RoHS & REACH compliant.

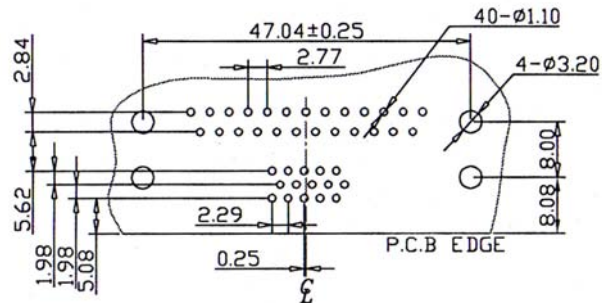

Recommended P.C. Board Layout

ORDERING INFORMATION:

P/N D P D - 2 5 $\frac{x}{1}$ H D 1 5 $\frac{x}{2}$ / $\frac{x}{3}$ $\frac{x}{4}$

1. TOP CONNECTOR TYPE:

"F" FEMALE
 "M" MALE

2. BOTTOM CONNECTOR TYPE:

"F" FEMALE
 "M" MALE

3. SPACING BETWEEN PORTS:

"A" 19.05MM(0.750")

4. FLANGE MOUNTING OPTION:

"N" #4-40UNC THREADED HOLES
 WITHOUT HEX SCREW BOLTS

"NH" #4-40UNC THREADED HOLES
 WITH BULK-PACKED (LOOSE)
 #4-40UNC HEX SCREW BOLTS

"NJ" #4-40UNC THREADED HOLES
 WITH INSTALLED (ASSEMBLED)
 #4-40UNC HEX SCREW BOLTS