


SIDE ENTRY 4-PORT MODULAR PCB JACK 10P PROFILE=12.00MM (FULLY SHIELDED)

SPECIFICATIONS

Insulation Resistance: 500MΩ Min.
Contact Resistance: 20mΩ Max.
Rating Current: 1.5A Max.
Rating Voltage: 120V AC.
Dielectric Voltage: 1000 Vrms 60 Sec. Min.
Temperature Range: -40°C / +85°C
Durability: 500 Mating cycles Min.

MATERIALS

Housing: PBT Glass Filled (UL 94V-0)
Soldering Temperature: 235°C
Color: Black
Spring Wire: Phosphor Bronze
 Gold plating Over Nickel
Shield: Brass plating Nickel Alloy
All materials must be RoHS compliant.

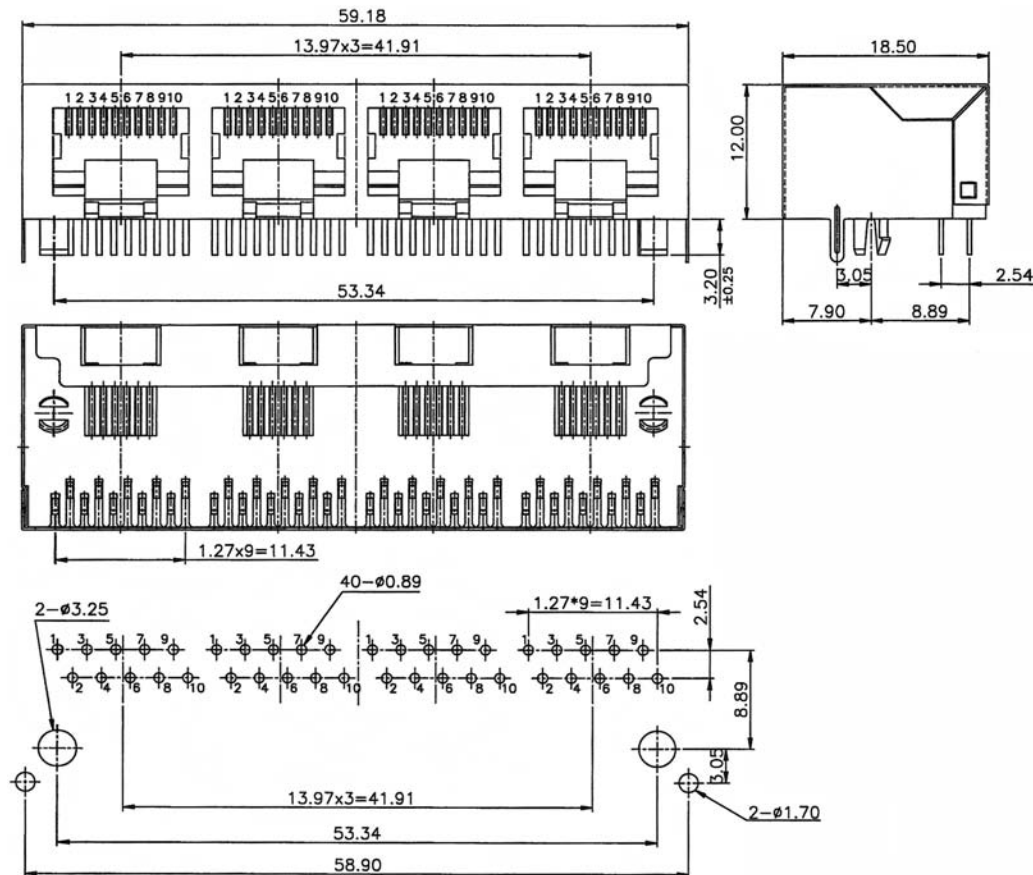

Recommended P.C.Board Layout
(TOP VIEW)

ORDERING INFORMATION:

P/N M J 2 J - $\frac{x}{1} \frac{x}{2} \frac{x}{3} B \frac{0}{3} 4$

- NO. OF POSITIONS & CONTACTS:
 "00" 10P10C
 "08" 10P8C
- CONTACT FINISH:
 "A" 6 MICROINCH GOLD
 "B" 15 MICROINCH GOLD
 "C" 30 MICROINCH GOLD
 "D" 50 MICROINCH GOLD
- NO. OF PORTS:
 04

NOTE: GROUNDING PIN SPACING= 3.05MM BEFORE PEG