


SIDE ENTRY MULTI-PORT MODULAR PCB JACK 8P PROFILE=13.60MM (FULLY SHIELDED)

SPECIFICATIONS

Insulation Resistance: 500MΩ Min.
Contact Resistance: 20mΩ Max.
Rating Current: 1.5A Max.
Rating Voltage: 120V AC.
Dielectric Voltage: 1000 Vrms 60 Sec. Min.
Temperature Range: -40°C / +85°C
Durability: 500 Mating cycles Min.

MATERIALS

Housing: PBT Glass Filled (UL 94V-0)
Soldering Temperature: 235°C
Color: Black
Spring Wire: Phosphor Bronze
 Gold plating Over Nickel
Shield: Brass plating Nickel Alloy
All materials must be RoHS compliant.

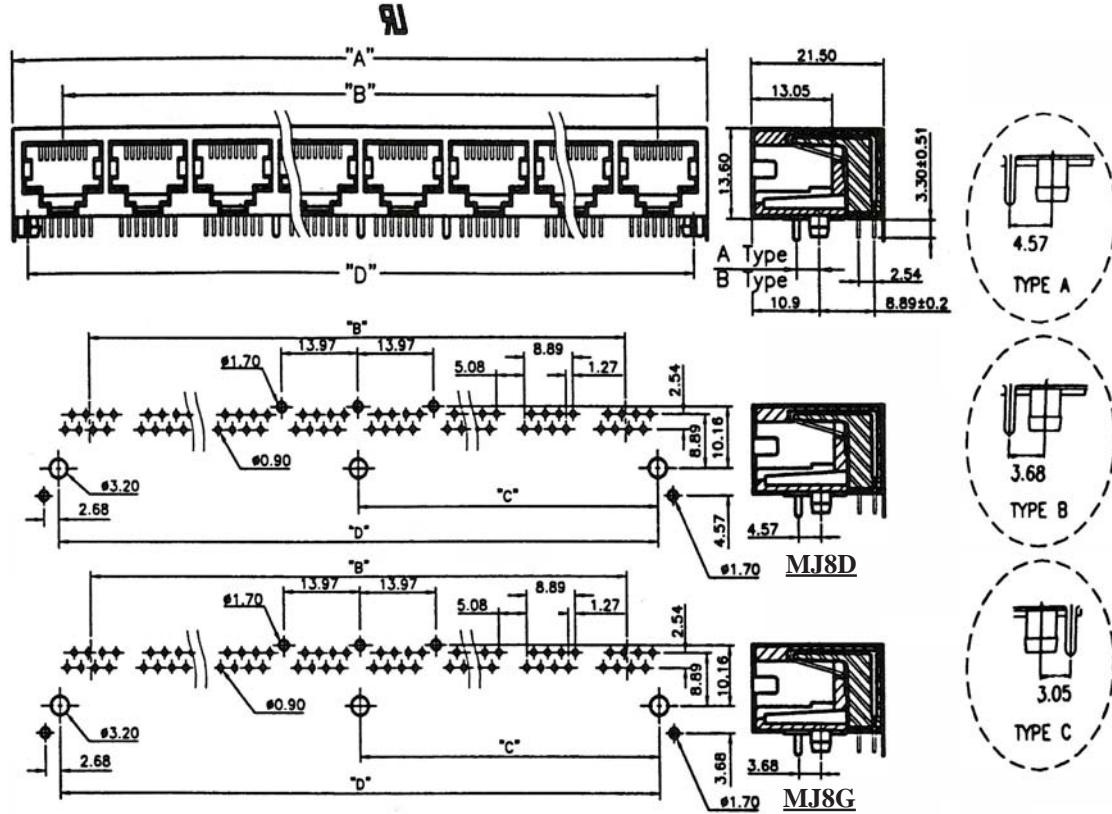

No. of Ports	DIM "A" ±0.25	DIM "B" ±0.20	DIM "C" ±0.10	DIM "D" ±0.15
02	31.24	13.97	----	25.40
04	59.18	41.91	26.67	53.34
06	87.12	69.85	40.64	81.28
08	115.06	97.79	54.61	109.22

ORDERING INFORMATION:

P/N MJ $\frac{x}{1}$ - $\frac{8}{2}$ $\frac{x}{3}$ B $\frac{x}{4}$

- TYPE OF PIN SPACING:
 "8D" TYPE A
 "8G" TYPE B
 "8X" TYPE C
- NO. OF POSITIONS & CONTACTS:
 "88" 8P8C
- CONTACT FINISH:
 "A" 6 MICROINCH GOLD
 "B" 15 MICROINCH GOLD
 "C" 30 MICROINCH GOLD
 "D" 50 MICROINCH GOLD
- NO. OF PORTS:
 02, 04, 05, 06, 08