


## SIDE ENTRY MULTI-PORT MODULAR PCB JACK WITH ROUND PINS 10P PROFILE=11.50MM (UNSHIELDED)

### SPECIFICATIONS

**Insulation Resistance:** 500MΩ Min.  
**Contact Resistance:** 20mΩ Max.  
**Rating Current:** 1.5A Max.  
**Rating Voltage:** 120V AC.  
**Dielectric Voltage:** 1000 Vrms 60 Sec. Min.  
**Temperature Range:** -40°C / +85°C  
**Durability:** 500 Mating cycles Min.

### MATERIALS

**Housing:** PBT Glass Filled (UL 94V-0)  
**Soldering Temperature:** 235°C  
**Color:** Black  
**Spring Wire:** Phosphor Bronze  
 Gold plating Over Nickel  
**All materials must be RoHS compliant.**

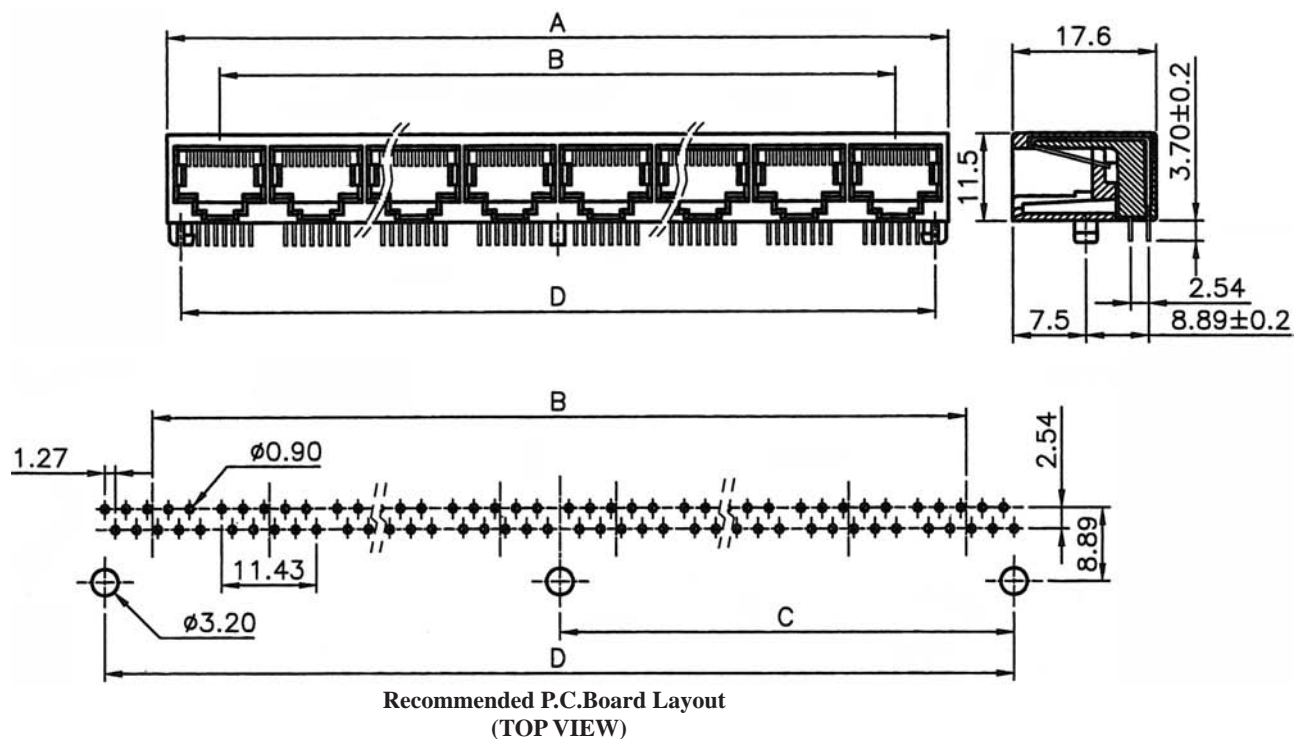

No. of Ports	DIM "A" ± 0.10 0.20	DIM "B" ± 0.20	DIM "C" ± 0.10	DIM "D" ± 0.15
02	30.48	13.97	-	25.40
04	58.42	41.91	-	53.34
06	86.36	69.85	-	81.28
08	114.30	97.79	54.61	109.22

### ORDERING INFORMATION:

P/N MJ8L -  $\frac{x}{1} \frac{x}{2} \frac{x}{3} B \frac{x}{3}$

- NO. OF POSITIONS & CONTACTS:  
 "00" 10P10C  
 "08" 10P8C
- CONTACT FINISH:  
 "A" 6 MICROINCH GOLD  
 "B" 15 MICROINCH GOLD  
 "C" 30 MICROINCH GOLD  
 "D" 50 MICROINCH GOLD
- NO. OF PORTS:  
 02, 04, 06, 08