


SIDE ENTRY MODULAR PCB JACK 4P PROFILE=11.90MM (UNSHIELDED)

SPECIFICATIONS

Insulation Resistance: 500MΩ Min.
Contact Resistance: 20mΩ Max.
Rating Current: 1.5A Max.
Rating Voltage: 120V AC.
Dielectric Voltage: 1000 Vrms 60 Sec. Min.
Temperature Range: -40°C / +85°C
Durability: 500 Mating cycles Min.

MATERIALS

Housing: PBT Glass Filled (UL 94V-0)
Soldering Temperature: 235°C
Color: Black & Gray
Spring Wire: Phosphor Bronze
 Gold plating Over Nickel
All materials must be RoHS compliant.

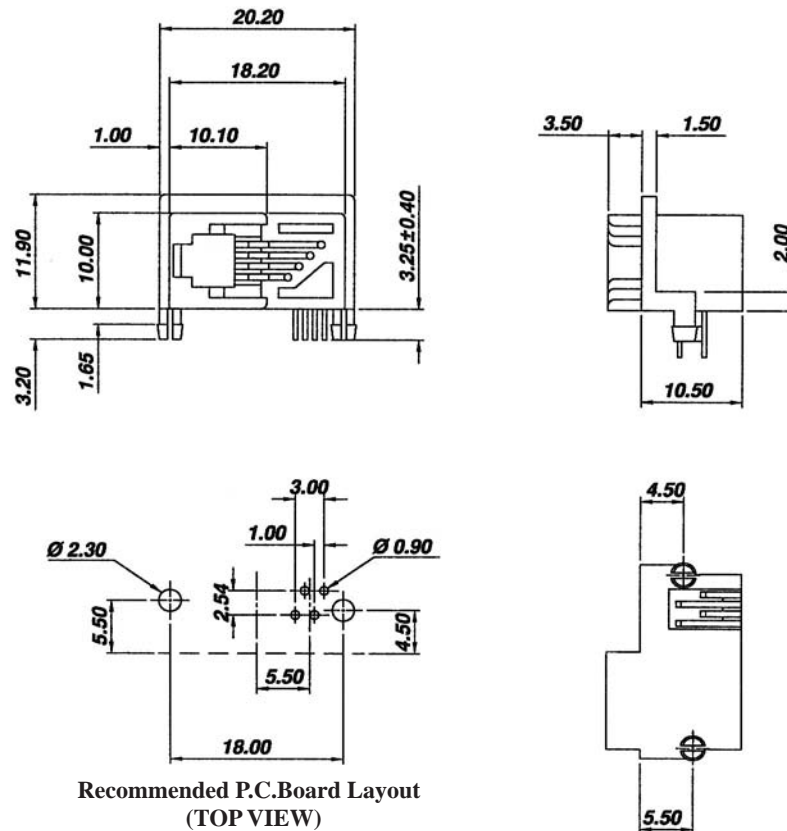

Recommended P.C.Board Layout
(TOP VIEW)

ORDERING INFORMATION:

P/N MJ7E - 44 x x
T 23

- NO. OF POSITIONS & CONTACTS:
"44" 4P4C
- CONTACT FINISH:
"A" 6 MICROINCH GOLD
"B" 15 MICROINCH GOLD
"C" 30 MICROINCH GOLD
"D" 50 MICROINCH GOLD
- HOUSING COLOR:
"A" GRAY
"B" BLACK

NOTE: P/N MJ7EHT-44xx for High Temp. Version