SIDE ENTRY UP LATCH MODULAR PCB JACK 6P+8P+10P PROFILE=14.00MM (UNSHIELDED)

SPECIFICATIONS

Insulation Resistance: 500MΩ Min.
Contact Resistance: 20mΩ Max.
Rating Current: 1.5A Max.
Rating Voltage: 120V AC.
Dielectric Voltage: 1000 Vrms 60 Sec. Min.
Temperature Range: -40ºc / +85ºc
Durability: 500 Mating cycles Min.

MATERIALS

Housing: PBT Glass Filled (UL 94V-0)
Soldering Temperature: 235ºc
Color: Black
Spring Wire: Phosphor Bronze
Gold plating Over Nickel
All materials must be RoHS compliant.

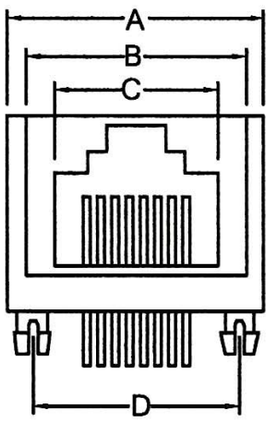

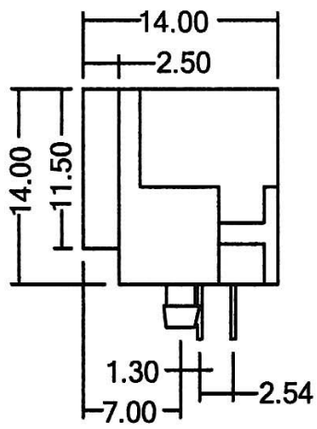

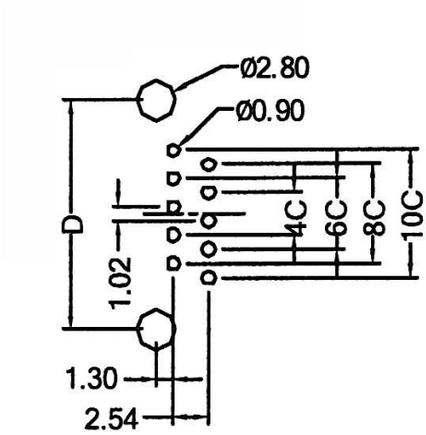

Recommended P.C.Board Layout (TOP VIEW)

No. of Positions	No. of Contacts	A	B	C	D
6P	2C/4C/6C	14.50	12.00	9.80	12.80
8P	8C	18.50	16.00	12.00	16.50
10P	10C	18.50	16.00	12.00	16.50

ORDERING INFORMATION:

P/N M J R 6 - $\frac{x\ x}{1}\ \frac{x}{2}$ B

1. NO. OF POSITIONS & CONTACTS:
   "66" 6P6C
   "64" 6P4C
   "88" 8P8C
   "84" 8P4C
   "00" 10P10C
2. CONTACT FINISH:
   "A" 6 MICROINCH GOLD
   "B" 15 MICROINCH GOLD
   "C" 30 MICROINCH GOLD
   "D" 50 MICROINCH GOLD
   "E" GOLD FLASH