


SIDE ENTRY UP LATCH MODULAR PCB JACK 4P PROFILE=14.50MM (UNSHIELDED)

SPECIFICATIONS

Insulation Resistance: 500M Ω Min.
Contact Resistance: 20m Ω Max.
Rating Current: 1.5A Max.
Rating Voltage: 120V AC.
Dielectric Voltage: 1000 Vrms 60 Sec. Min.
Temperature Range: -40 $^{\circ}$ c / +85 $^{\circ}$ c
Durability: 500 Mating cycles Min.

MATERIALS

Housing: PBT Glass Filled (UL 94V-0)
Soldering Temperature: 235 $^{\circ}$ c
Color: Black
Spring Wire: Phosphor Bronze
Gold plating Over Nickel
All materials must be RoHS compliant.

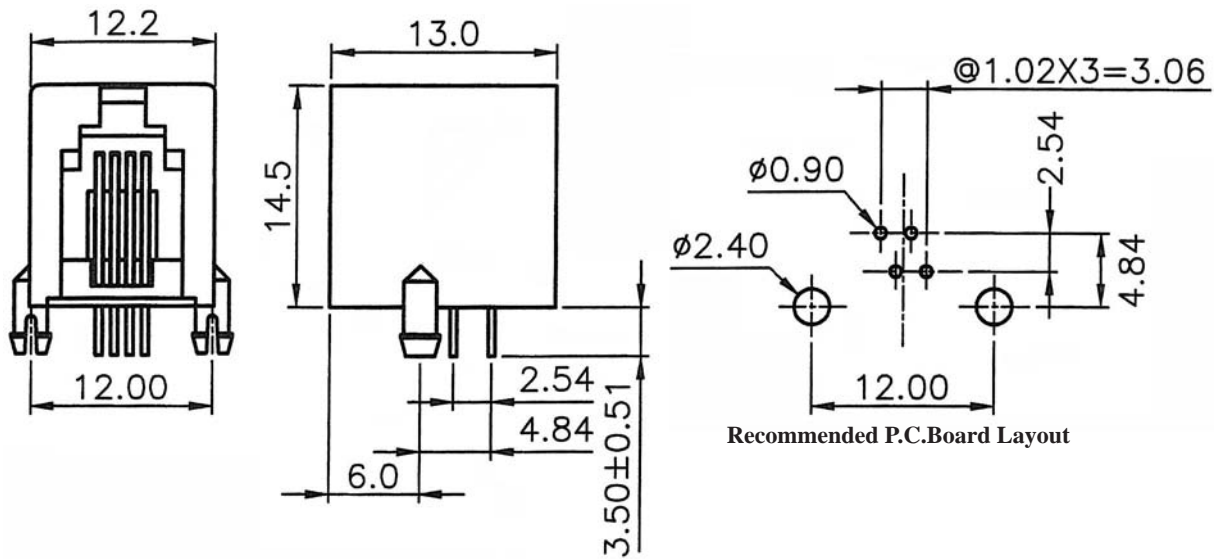

ORDERING INFORMATION:

P/N M J 6 U - $\frac{44}{T} \frac{x}{2} \frac{x}{3}$

1. NO. OF POSITIONS & CONTACTS:
"44" 4P4C
2. CONTACT FINISH:
"A" 6 MICROINCH GOLD
"B" 15 MICROINCH GOLD
"C" 30 MICROINCH GOLD
"D" 50 MICROINCH GOLD
3. HOUSING COLOR:
"A" GRAY
"B" BLACK