



## SIDE ENTRY UP LATCH MODULAR PCB JACK 4P+6P PROFILE=18.50MM (UNSHIELDED)

### SPECIFICATIONS

**Insulation Resistance:** 500MΩ Min.  
**Contact Resistance:** 20mΩ Max.  
**Rating Current:** 1.5A Max.  
**Rating Voltage:** 120V AC.  
**Dielectric Voltage:** 1000 Vrms 60 Sec. Min.  
**Temperature Range:** -40°C / +85°C  
**Durability:** 500 Mating cycles Min.

### MATERIALS

**Housing:** PBT Glass Filled (UL 94V-0)  
**Soldering Temperature:** 235°C  
**Color:** Gray  
**Spring Wire:** Phosphor Bronze  
 Gold plating Over Nickel  
**All materials must be RoHS compliant.**

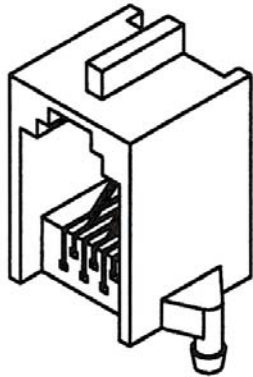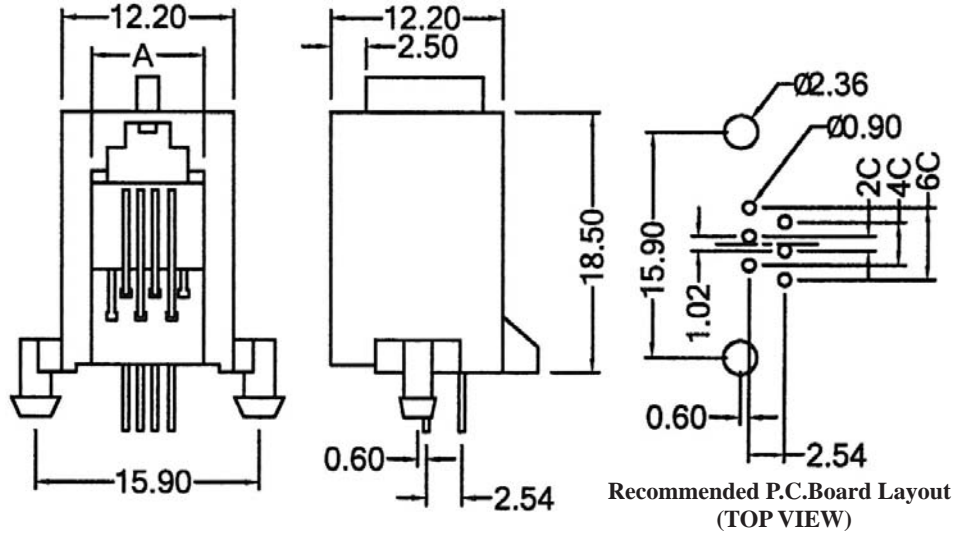

No. of Positions	No. of Contacts	A
(6P)4P	4C	7.90
6P	2C/4C/6C	9.90

### ORDERING INFORMATION:

P/N M J R 2 -  $\frac{x x x A}{T 2 3}$

- NO. OF POSITIONS & CONTACTS:
  - "66" 6P6C
  - "64" 6P4C
  - "44" 4P4C
- CONTACT FINISH:
  - "A" 6 MICROINCH GOLD
  - "B" 15 MICROINCH GOLD
  - "C" 30 MICROINCH GOLD
  - "D" 50 MICROINCH GOLD
- HOUSING COLOR:
  - "A" GRAY