


SIDE ENTRY 4-PORT MAGNETIC 10/100 BASE-T JACK WITH LED 8P (UNSHIELDED)

SPECIFICATIONS

Insulation Resistance: 500MΩ Min.
 Contact Resistance: 20mΩ Max.
 Rating Current: 1.5A Max.
 Rating Voltage: 120V AC.
 Dielectric Voltage: 1000 Vrms 60 Sec. Min.
 Temperature Range: -40°C / +85°C
 Durability: 500 Mating cycles Min.

MATERIALS

Housing: Nylon (UL 94V-0)
 Soldering Temperature: 260°C
 Color: Black
 Spring Wire: Phosphor Bronze
 Gold plating Over Nickel
 All materials must be RoHS compliant.

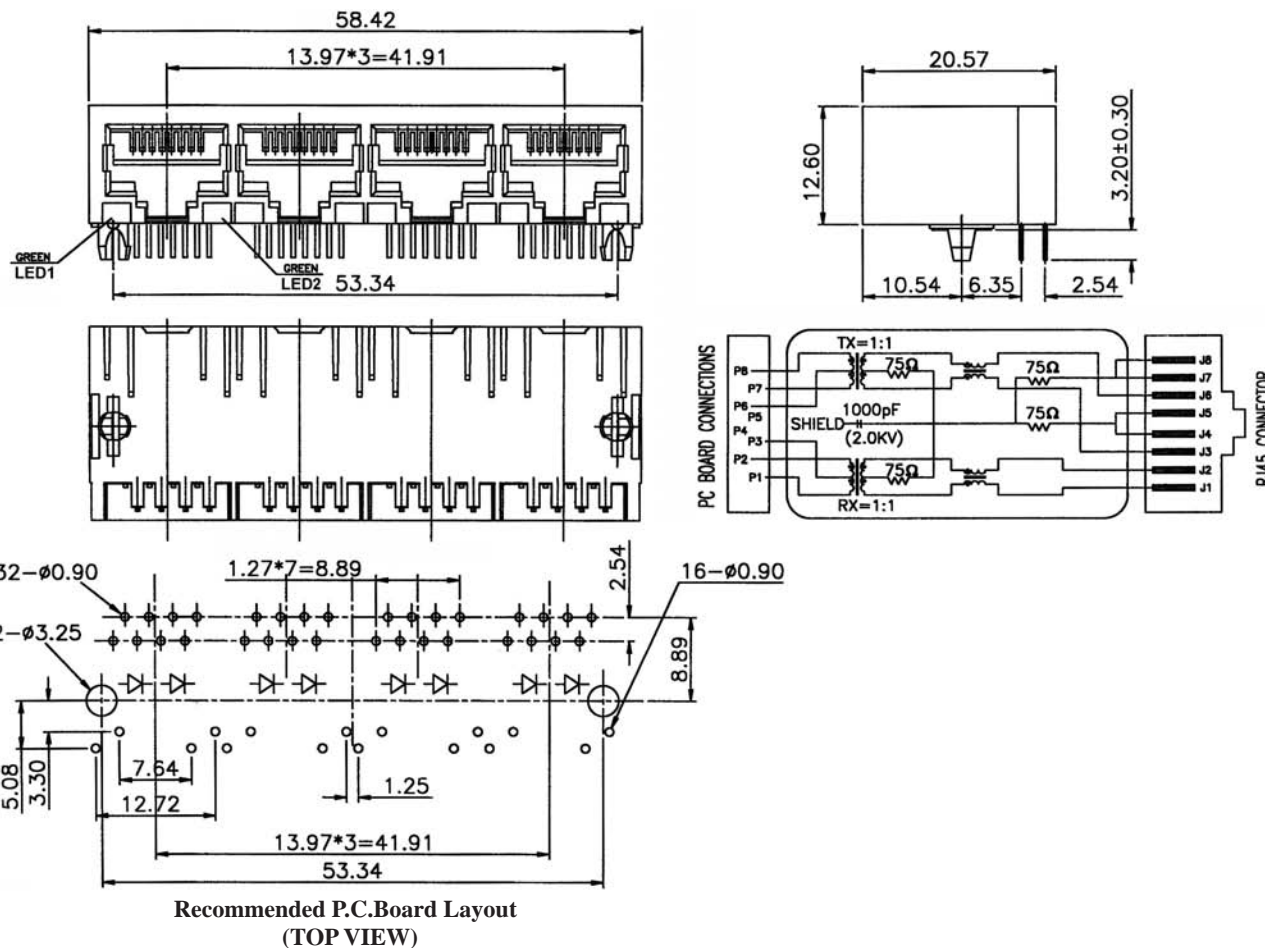

ORDERING INFORMATION:

P/N M J M 8 - 8 8 x B 0 1 x x 0 4
 1 2 3 4 5

- | | |
|---|--|
| <p>1. NO. OF POSITIONS & CONTACTS:
 "88" 8P8C</p> <p>2. CONTACT FINISH:
 "A" 6 MICROINCH GOLD
 "B" 15 MICROINCH GOLD
 "C" 30 MICROINCH GOLD
 "D" 50 MICROINCH GOLD</p> <p>3. MAGNETIC SCHEMATICS:
 01</p> | <p>4. COLORS OF LED:
 "XX" W/O LED
 "NN" LED1: GREEN & LED2: GREEN
 "NY" LED1: GREEN & LED2: YELLOW
 "YN" LED1: YELLOW & LED2: GREEN
 "YY" LED1: YELLOW & LED2: YELLOW</p> <p>5. NO. OF PORTS:
 04</p> |
|---|--|