


## TOP ENTRY MODULAR SMT JACK WITH SOLDER PAD 4P+6P+8P+10P PROFILE=12.80MM (UNSHIELDED)

### SPECIFICATIONS

**Insulation Resistance:** 500MΩ Min.  
**Contact Resistance:** 20mΩ Max.  
**Rating Current:** 1.5A Max.  
**Rating Voltage:** 120V AC.  
**Dielectric Voltage:** 1000 Vrms 60 Sec. Min.  
**Temperature Range:** -40°C / +85°C  
**Durability:** 500 Mating cycles Min.

### MATERIALS

**Housing:** Nylon (UL 94V-0)  
**Soldering Temperature:** 260°C  
**Color:** Black  
**Spring Wire:** Phosphor Bronze  
 Gold plating Over Nickel  
**All materials must be RoHS compliant.**

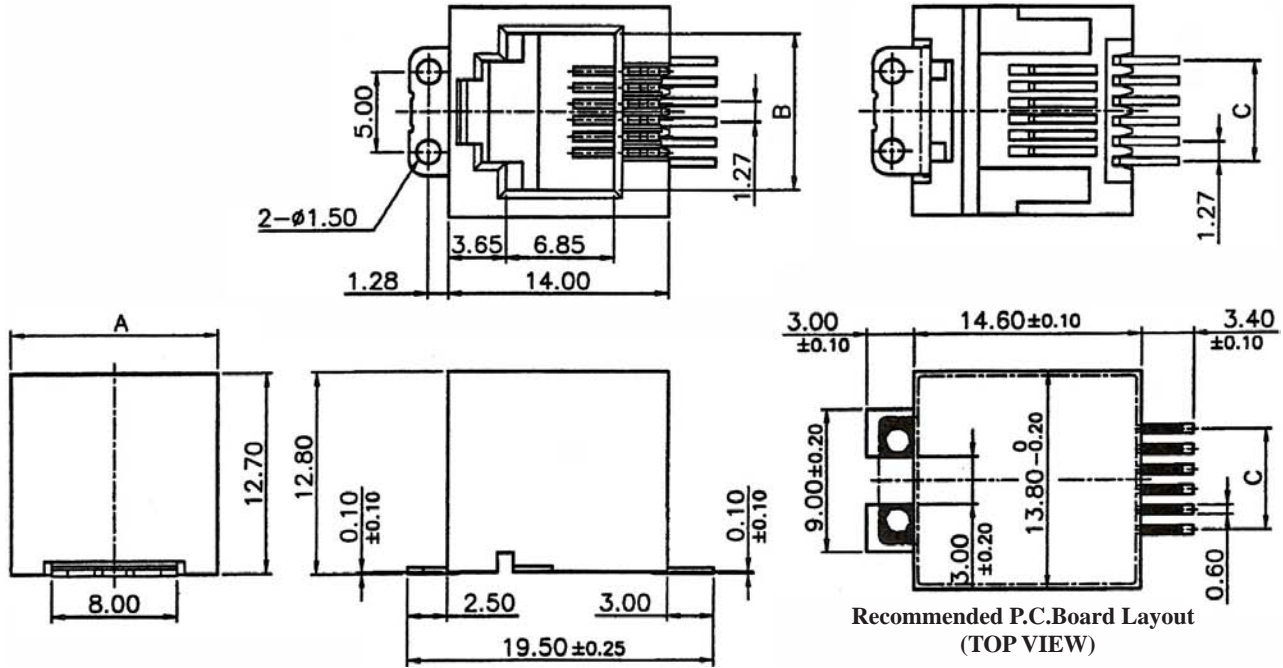

| No. of Positions | Dimensions |       |            |
|------------------|------------|-------|------------|
|                  | A          | B     | C          |
| 4                | 13.21      | 7.82  | 3.81       |
| 6                | 13.21      | 9.85  | 6.35       |
| 8/10             | 15.50      | 11.85 | 8.89/11.43 |

### ORDERING INFORMATION:

P/N M J 4 Y -  $\frac{x}{1}$   $\frac{x}{2}$  B -  $\frac{x}{3}$

#### 1. NO. OF POSITIONS & CONTACTS:

"66" 6P6C  
 "64" 6P4C  
 "88" 8P8C  
 "00" 10P10C  
 "44" 4P4C

#### 2. CONTACT FINISH:

"A" 6 MICROINCH GOLD  
 "B" 15 MICROINCH GOLD  
 "C" 30 MICROINCH GOLD  
 "D" 50 MICROINCH GOLD

#### 3. PACKAGE OPTION:

" " TRAY  
 "R" TAPE & REEL