



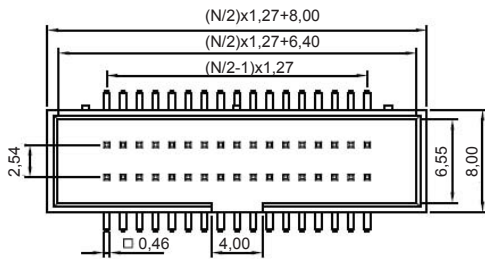




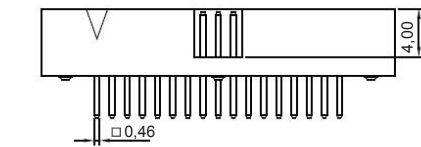


(SMD) Wannenstiflleisten Raster 1,27x2,54 / (SMT) Box Header pitch 1,27x2,54

Serie 082

Raster / Pitch
1,27mm

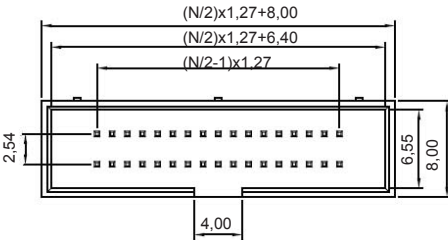

Empfohlenes Leiterplatten Layout
 Recommended P.C.B. Layout
 (PCB Tolerance ±0,05)

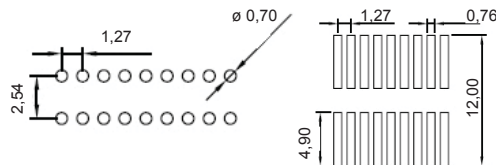

Technische Daten / Technical Data
 Isolierkörper / Insulator Nylon 6T (UL94-V0)
 Kontakmaterial / Contact material Kupfer / Copper alloy
 Nennspannung / Current Voltage 250V AC
 Nennstrom / Current Rating 1 A
 Temperaturbereich / Temperatur Range -40°C...+105°C
 Lötwärmebeständigkeit / Resistance soldering 235°C (30-60 sec.)
 260°C (10 sec.)

weitere Informationen auf Anfrage / more information on request



Bestellbeispiel
 How to order

Bitte ersetzen Sie X durch unten aufgeführten Code
 Please replace X with coding listed below

082	XX	XX	2	X	X	X	X	X	-	X	X
-----	----	----	---	---	---	---	---	---	---	---	---

00 = Gerade / straight - gewinkelt / right angled
 01 = SMD / SMT

Veredelung / Plating
 FL= Flash vergoldet / flash gold plating
 (andere Veredelungen auf Anfrage / other platings on request)

Anzahl Reihe / Number of row
 2= 2-reihig / 2-row

Ausführung / Version
 1= gerade- SMD / straight- SMT 2= gewinkelt / right angled

Raster / Pitch
 1= 1,27mm 9= Sonderraster / other pitch

Polzahl / Number of contacts
 006 / 008 / 010 / 012 / 014 / 034 / 040 / 080 / 100

Pick and Place Pad option
 0= ohne / without PP-Pad 1= mit / with PP-Pad (nur SMD / only SMT)

Verpackung / Packaging
 0= Schüttgut / Bulk 1=Stange / Tube 2=Rolle / Reel (auf Anfrage / on request) 03= Blister / Tray (Standard)