



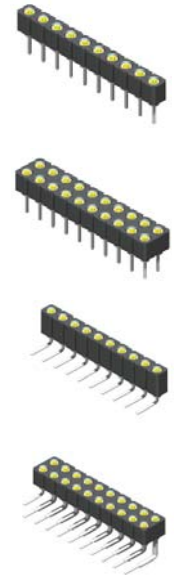

### Buchsenleisten Raster 1,27mm / Female Header pitch 1,27mm

## Serie 123

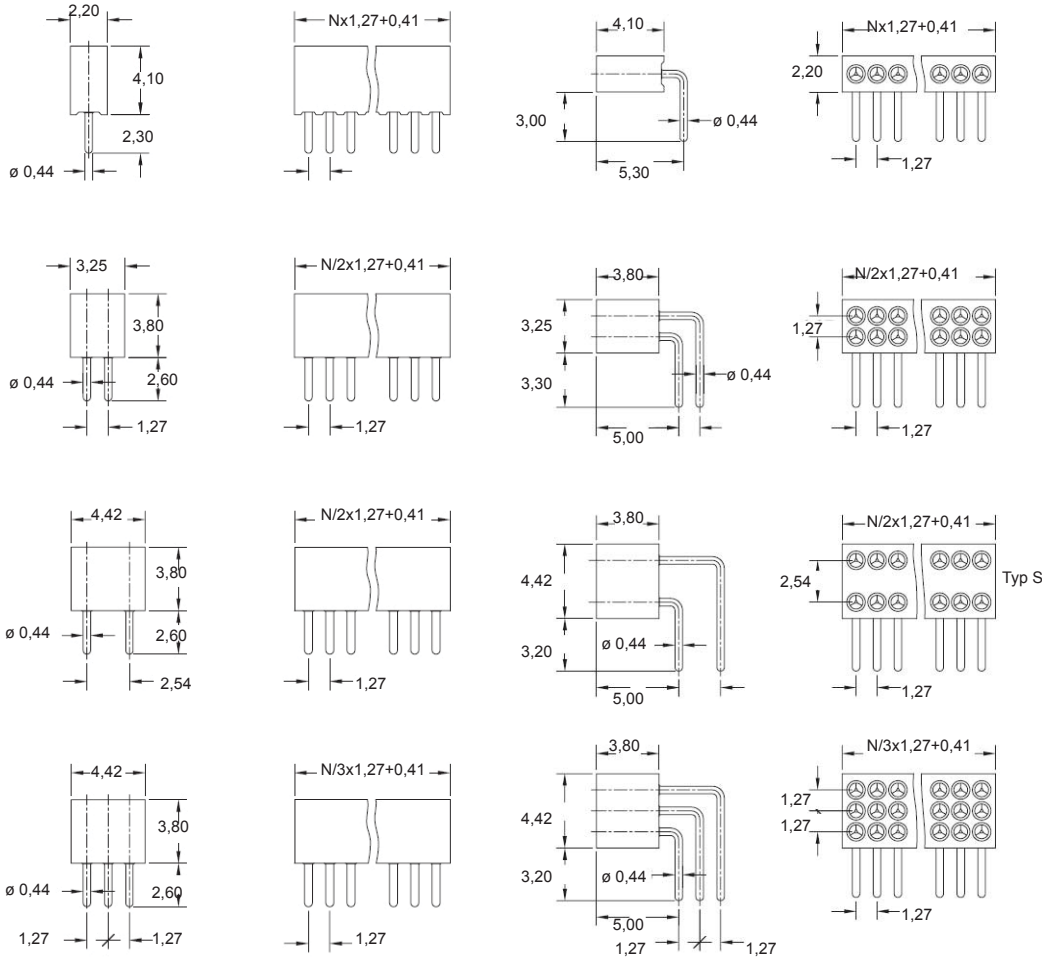





Raster / Pitch  
1,27mm

Bauhöhe 3,45 / 4,00mm  
total height 3,45 / 4,00mm

Für Rundstift 0,38-0,50mm  
for round pin 0,38-0,50mm



Empfohlenes Leiterplatten Layout  
Recommended P.C.B. Layout  
(PCB Tolerance ±0,05)



Technische Daten / Technical Data  
 Isolierkörper / Insulator  
 Kontaktmaterial / Contact material  
 Nennspannung / Current Voltage  
 Nennstrom / Current Rating  
 Temperaturbereich / Temperatur Range  
 Lötwärmebeständigkeit / Resistance soldering

PPS-GF30-FR (UL94-V0)  
 Brass CuZn36PB3  
 250V AC  
 1 A  
 -55°C...+125°C  
 235°C (30-60 sec.)  
 260°C (10 sec.)

weitere Informationen auf Anfrage / more information on request

Bestellbeispiel  
How to order

Bitte ersetzen Sie X durch unten aufgeführten Code  
Please replace X with coding listed below

123 0H XX X X X X X

Veredelung / Plating

SF= Selektiv Flash vergoldet / selective flash gold plating  
(andere Veredelungen auf Anfrage / other platings on request)

Anzahl Reihe / Number of row

1= 1-reihig / 1-row, 2= 2-reihig / 2-row, 3= 3-reihig / 3-row. S= 2-reihig Reihenabstand 2,54mm / 2-row row pitch 2,54mm

Ausführung / Version

1= gerade / straight 2= gewinkelt / right angled

Raster / Pitch

1= 1,27mm 9= Sonderraster / other pitch

Polzahl / Number of contacts

002...050 (1-reihig / 1-row) 004...080 (2-reihig / 2-row) 009...150 (3-reihig / 3-row)