

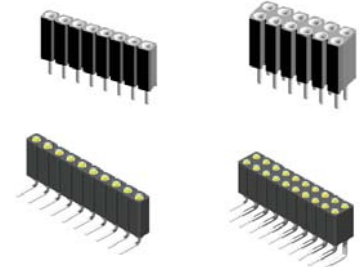
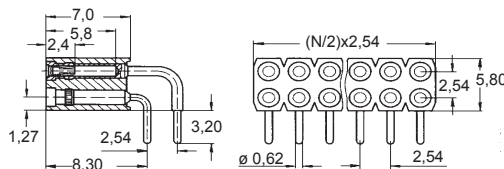
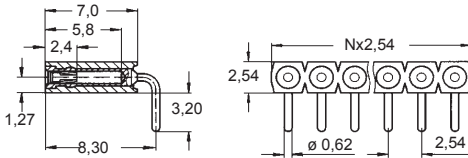


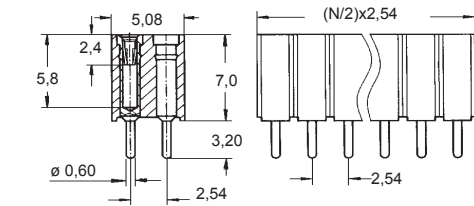

Buchsenleisten Raster 2,54mm / Female Header pitch 2,54mm

Serie 164

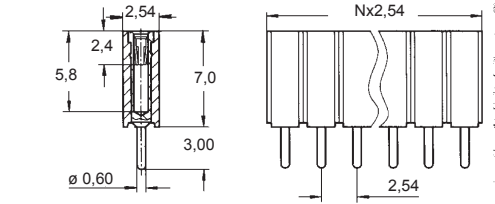


Bauhöhe 7,0mm
 total height 7,0mm

Für Vierkantstift 0,64mm
 und Rundstift 0,7-0,9mm
 for square pin 0.64mm and
 round pin 0,7-0,9mm



Raster / Pitch
 2,54mm

Empfohlenes Leiterplatten Layout
 Recommended P.C.B. Layout
 (PCB Tolerance ±0,05)



Technische Daten / Technical Data
 Isolierkörper / Insulator
 Kontaktmaterial / Contact material
 Nennspannung / Current Voltage
 Nennstrom / Current Rating
 Temperaturbereich / Temperatur Range
 Lötwärmebeständigkeit / Resistance soldering

PPS-GF30-FR (UL94-V0)
 Brass CuZn36PB3
 250V AC
 3 A
 -55°C...+125°C
 235°C (30-60 sec.)
 260°C (10 sec.)

weitere Informationen auf Anfrage / more information on request

Bestellbeispiel
 How to order

Bitte ersetzen Sie X durch unten aufgeführten Code
 Please replace X with coding listed below

164 0H XX X X X X X X

Veredelung / Plating
SF= Selektiv flash vergoldet / selective flash gold plating **25**= 0,25µm selektiv vergoldet / selective gold plating
 (andere Veredelungen auf Anfrage / other platings on request)

Anzahl Reihe / Number of row
1= 1-reihig / 1-row **2**= 2-reihig / 2-row

Ausführung / Version
1= gerade / straight **2**= gewinkelt / right angled

Raster / Pitch
2= 2,54mm **3**= 5,08mm **9**= Sonderraster / other pitch

Polzahl / Number of contacts
003...040 (1-reihig / 1-row) **004...080** (2-reihig / 2-row)