



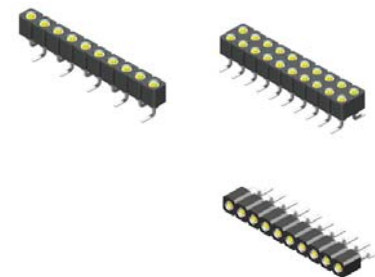


SMD Buchsenleisten Raster 2,54mm / SMT Female Header pitch 2,54mm

Serie 169H8



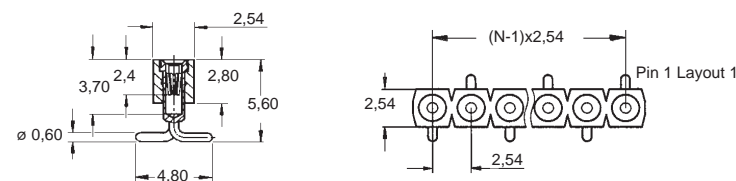


Bauhöhe 5,6mm
total height 5,6mm

Für Vierkantstift 0,64mm
und Rundstift 0,7-0,9mm
for square pin 0,64mm and
round pin 0,7-0,9mm

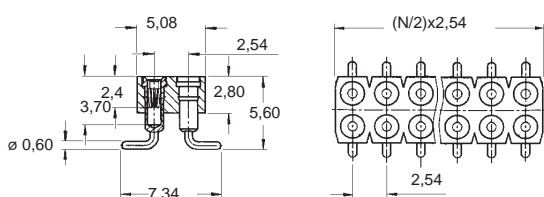

Empfohlenes Leiterplatten Layout
Recommended P.C.B. Layout
(PCB Tolerance $\pm 0,05$)

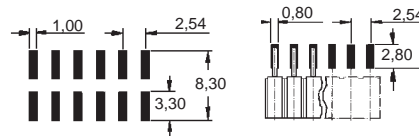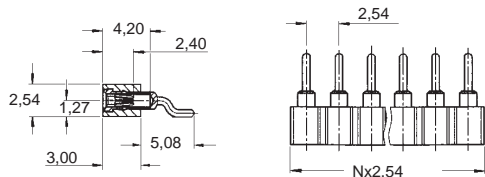

Technische Daten / Technical Data
 Isolierkörper / Insulator
 Kontaktmaterial / Contact material
 Nennspannung / Current Voltage
 Nennstrom / Current Rating
 Temperaturbereich / Temperatur Range
 Lötwärmebeständigkeit / Resistance soldering

PPS-GF30-FR (UL94-V0)
 Brass CuZn36PB3
 250V AC
 3A
 -55°C...+125°C
 235°C (30-60 sec.)
 260°C (10 sec.)

weitere Informationen auf Anfrage / more information on request

Bestellbeispiel
How to order

Bitte ersetzen Sie X durch unten aufgeführten Code
Please replace X with coding listed below

169	H8	XX	X	1	X	X	X	X	-	X	X
-----	----	----	---	---	---	---	---	---	---	---	---

Veredelung / Plating

SF= Selektiv flash vergoldet / selective flash gold plating
(andere Veredelungen auf Anfrage / other platings on request)

Anzahl Reihe / Number of row

1= 1-reihig / 1-row 2= 2-reihig / 2-row

Ausführung / Version

1= stehend / standing 2= liegend / lying (nur 1-reihig / only 1-row)

Raster / Pitch

2= 2,54mm 3= 5,08mm 9= Sonderraster / other pitch

Polzahl / Number of contacts

003...040 (1-reihig / 1-row) 004...072 (2-reihig / 2-row)

Pick and Place Pad option

0= ohne / without PP-Pad 1= mit / with PP-Pad

Verpackung / Packaging

0= Schüttgut / Bulk (Standard) 2=Rolle / Reel (auf Anfrage / on request)