




Buchsenleisten Raster 2,54mm / Female Header pitch 2,54mm


Serie 19E

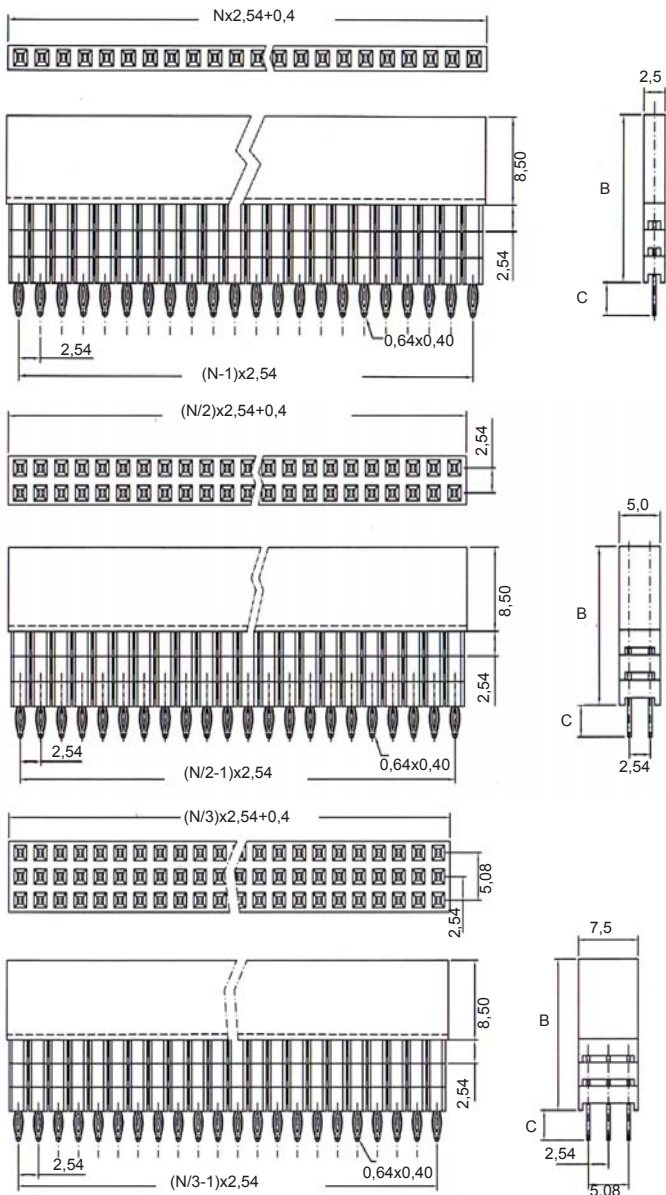

Abmessungen / dimensions

Code	B	C
1W	11,05	3,20
2Y	13,59	3,20
3Y	16,13	3,20
4Z	18,67	3,20

Andere Abmessungen auf Anfrage / other dimensions on request




Bauhöhe variabel
total height variable

Für Vierkantstift 0,64mm
for square pin 0,64mm



Raster / Pitch
2,54mm

Empfohlenes Leiterplatten Layout
Recommended P.C.B. Layout
(PCB Tolerance ±0,05)



Technische Daten / Technical Data
 Isolierkörper / Insulator
 Kontaktmaterial / Contact material
 Nennspannung / Current Voltage
 Nennstrom / Current Rating
 Temperaturbereich / Temperatur Range
 Lötwärmebeständigkeit / Resistance soldering

PBT (UL94-V0)
 Phosphor Bronze
 250V AC
 3A
 -40°C...+105°C
 235°C (30-60 sec.)

weitere Informationen auf Anfrage / more information on request

Bestellbeispiel
How to order

Bitte ersetzen Sie X durch unten aufgeführten Code
Please replace X with coding listed below



Codierung / Encoded
(siehe Tabelle) / (see table)

Veredelung / Plating
00= verzinkt / tin plating **FL**= flash vergoldet / flash gold plating
 (andere Veredelungen auf Anfrage / other platings on request)

Anzahl Reihe / Number of row
1= 1-reihig / 1-row **2**= 2-reihig / 2-row **3**= 3-reihig / 3-row

Ausführung / Version
1= gerade / straight

Raster / Pitch
2= 2,54mm **3**= 5,08mm **9**= Sonderraster / other pitch

Polzahl / Number of contacts
003...040 (1-reihig / 1-row) **004...080** (2-reihig / 2-row) **009...120** (3-reihig / 3-row)